查询TPR400供应商

GHz TECHNOLOGY
RF·MICROWAVE SILICON POWER TRANSISTORS

TPR 400

400 Watts, 50 Volts, Pulsed
Avionics 1030 - 1090 MHz

GENERAL DESCRIPTION

The TPR 400 is a high power COMMON BASE bipolar transistor. It is designed for pulsed systems in the frequency band 1030-1090 MHz. The device has gold thin-film metallization for proven highest MTTF. The transistor includes input prematch for broadband capability. Low thermal resistance package reduces junction temperature, extends life.

CASE OUTLINE
55CX, STYLE 1

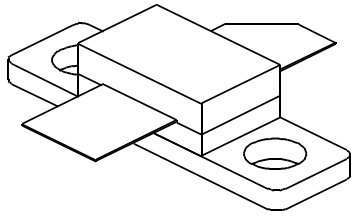

ABSOLUTE MAXIMUM RATINGS

Maximum Power Dissipation @ 25°C[2]		875 Watts
Maximum Voltage and Current		
BVces	Collector to Base Voltage	55 Volts
BVebo	Emitter to Base Voltage	4.0 Volts
Ic	Collector Current	30 Amps
Maximum Temperatures		
Storage Temperature		- 65 to + 150°C
Operating Junction Temperature		+ 200°C

ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Out	F = 1030-1090 MHz	400			Watts
Pin	Power Input	Vcc = 50 Volts			75	Watts
Pg	Power Gain	PW = 10 µsec	7.27			dB
η_c	Collector Efficiency	DF = 1%		40		%
VSWR	Load Mismatch Tolerance	F = 1090 MHz			20:1	

BVebo	Emitter to Base Breakdown	Ie = 20 mA	4.0			Volts
BVces	Collector to Emitter Breakdown	Ic = 25 mA	55			Volts
$\mathbf{h_{FE}}$	DC - Current Gain	Ic = 2.5 A, Vce = 5 V	10		100	
θ**jc**[2]	Thermal Resistance				0.2	°C/W

Note 1: At rated output power and pulse conditions
2: At rated pulse conditions

Issue B, February 1998

GHz TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHz RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.

GHz Technology Inc. 3000 Oakmead Village Drive, Santa Clara, CA 95051-0808 Tel. 408 / 986-8031 Fax 408 / 986-8120

GHz TECHNOLOGY
RF·MICROWAVE SILICON POWER TRANSISTORS

TPR400

POWER OUTPUT vs FREQUENCY

Vcc = 50 V, Pin = 75 W

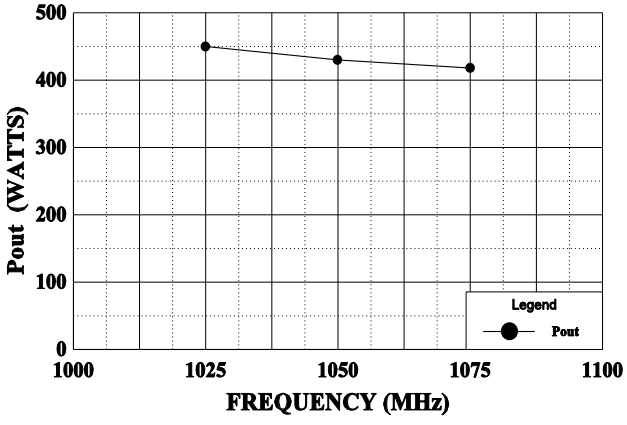

THERMAL RESISTANCE vs PULSE WIDTH

Vcc - 50 V, F = 1090 MHz

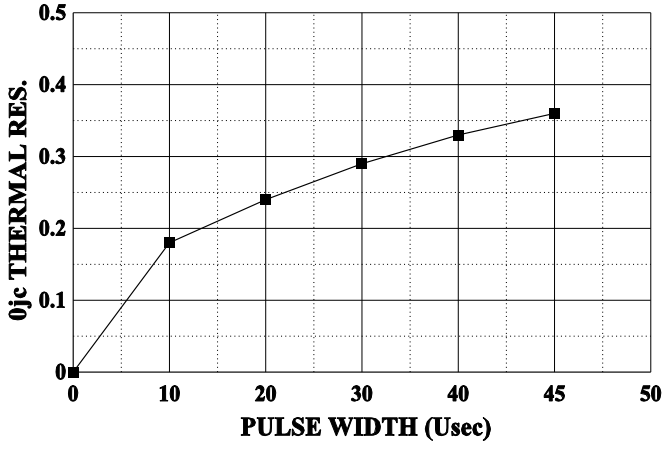

SERIES INPUT IMPEDANCE vs FREQUENCY

Vcc = 50 V, Pin = 75 W

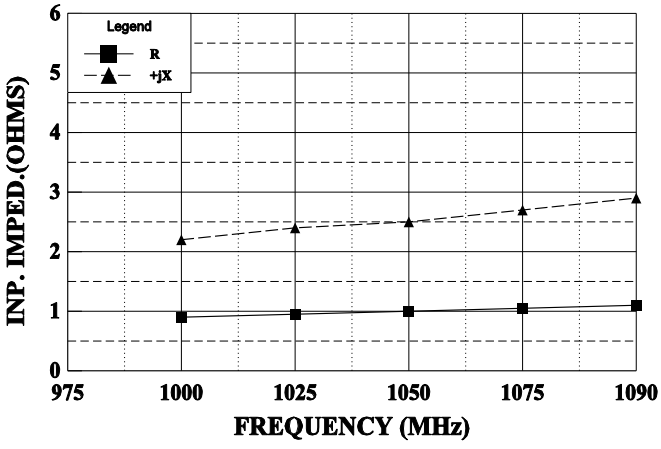

SERIES LOAD IMPEDANCE vs FREQUENCY

Vcc = 50 V, Pin = 75 W

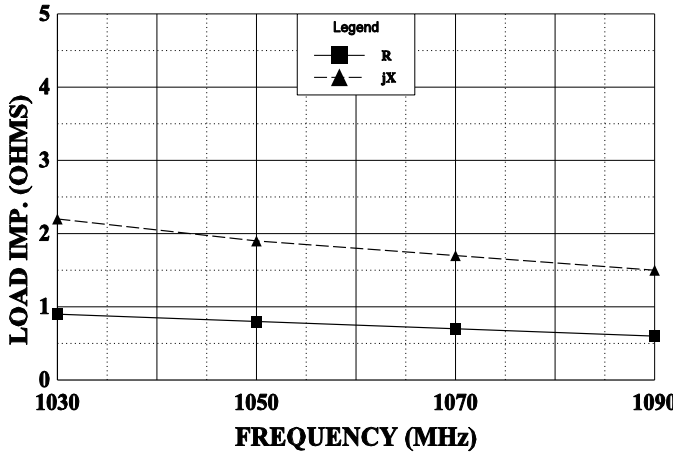

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

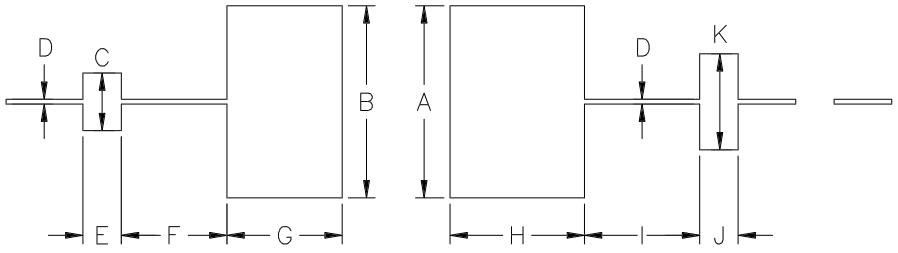

DIM	INCHES
A	1.000
B	1.000
C	.300
D	.025
E	.200
F	.550
G	.600
H	.700
I	.600
J	.200
K	.500

DME 375 / TPR 400 TEST FIXTURE
1030/1090 MHz – TEST AMPLIFIER (FIG1)

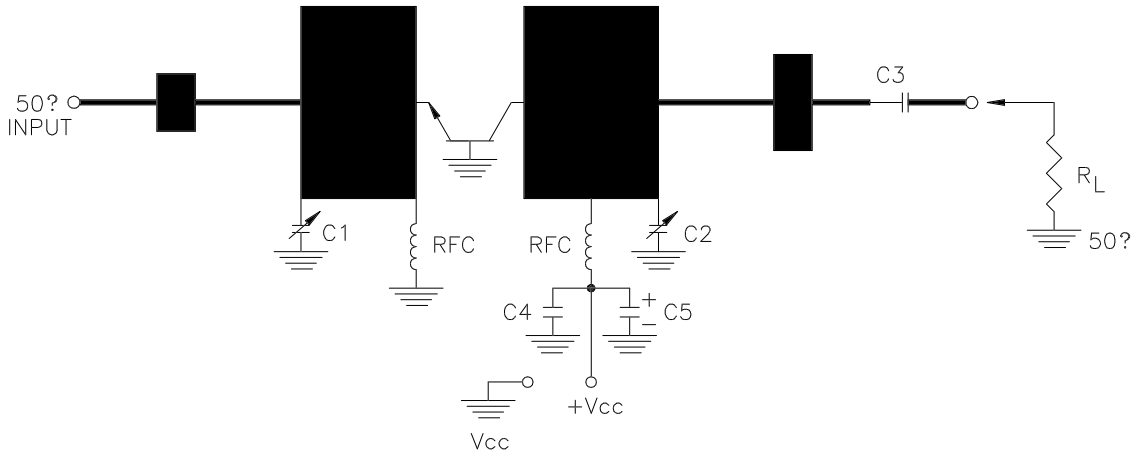

▬ – MICROSTRIP LINE: DUROID, 10 MIL DIELECTRIC D 5880
C1, C2 – 0.6–6pf VAR. CAP.
C3, C4 – 82 pf CHIP
C5 – 200 MFD CAP.

GHz TECHNOLOGY	CAGE	DWG NO.	REV
	0PJR2	DME 375 / TPR 400	–
		SCALE 1/1	SHEET